PART-3 EXECUTION

3.01 PREPARATION

A. Examine areas to receive toilet compartments for correct height and spacing of anchorage/blocking and plumbing fixtures that may affect installation of compartments. Report any discrepancies to the architect.

B. Take complete and accurate measurements of toilet compartment locations.

C. Start of work constitutes acceptance of job.

3.02 INSTALLATION

A. Install compartments in a rigid, straight, plumb and level manner with steel as shown on the shop drawings and manufacturer's installation instructions.

B. All doors and panels to be mounted at 12" above the finished floor unless otherwise specified.

C. Clearance at vertical edges of door shall be uniform top to bottom.

D. No evidence of cutting, drilling and/or patching shall be visible on the finished work.

E. Finished surfaces shall be cleaned after installation and be left free of all imperfections.

3.03 WARRANTY

A. Global Partitions guarantees its powder coated steel units, properly maintained, against corrosion or discoloration for 3 years from the date of receipt by the customer. If materials are found defective during that period for the reasons listed above, the material will be replaced free of charge. No credits or allowances will be issued for any labor or expenses relating to the replacement of components covered under the warranty plan. All such expenses are to be borne by the buyer.

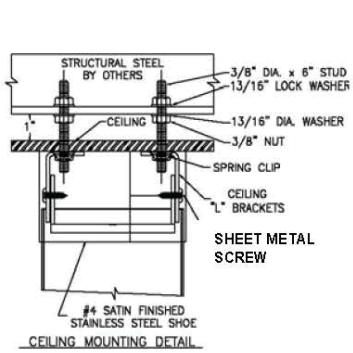

CEILING MOUNTING DETAIL

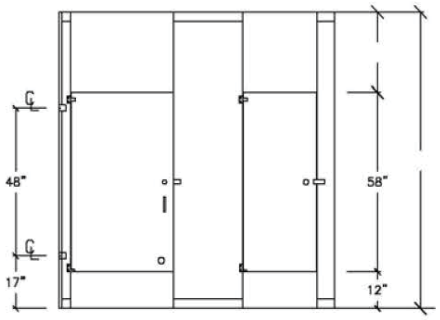

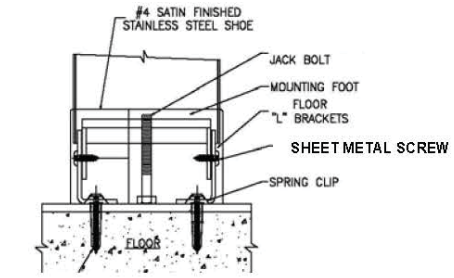

EXPANSION SHIELD & SCREW

MOUNTING DETAIL

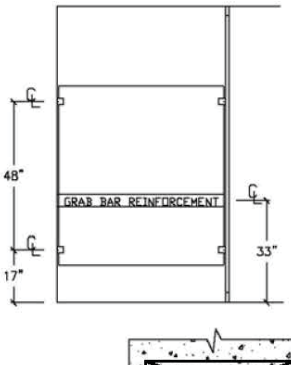

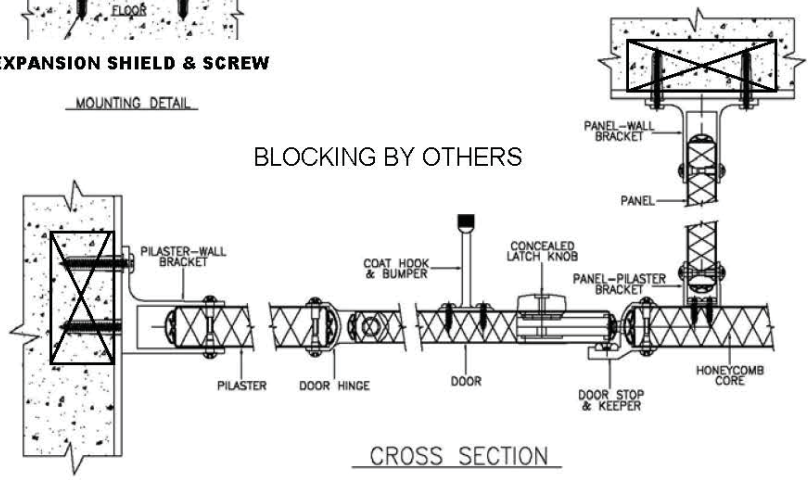

CROSS SECTION

.05